




SAFE-T-PUNCH™

PRODUCT DATA SHEET

STP40D

July 2024 Rev 5

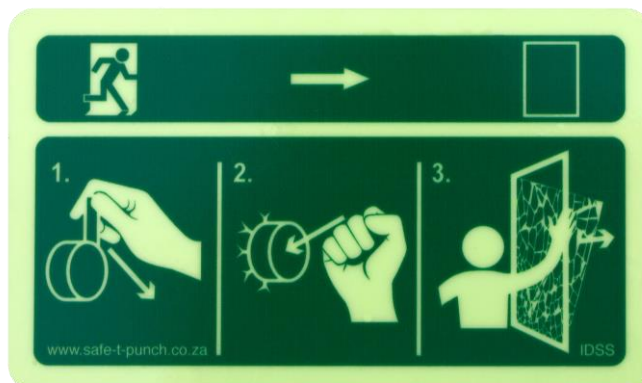

Heavy-duty 40mm Diameter Double Glazing device for 3mm to 12 mm Toughened Glass

Components:-

Body:-	Black anodised aluminium
Plunger:-	Red anodised aluminium
Safety tag:-	Breakaway plastic
Impact tip:-	Carbide hard material
Adhesive:-	3M 4936 VHB Tape
Device Weight:-	96 g
Instructions Sticker Weight:-	12 g
Operating Instructions:-	IDSS (black-backed) Photoluminescent Grade C vinyl 136mm X 80mm Self-adhesive

Performance data:-

Double glazing gap:-	20 mm
Operating means:-	By Hand.
Operating force required:-	3 Joules.
Temperature range:-	-20°C to 80°C

Critical requirements:-


Installation:-	Install SAFE-T-PUNCH™ on clearly marked readily breakable toughened safety glass only.
Suitability:-	NOT suitable for use on laminate glass (Front windscreen of vehicles).
Installation method:-	Clean, Peel and Stick.
Special instructions:-	The STP40D must be used in conjunction with 100-micron PET window film in accordance with our recommended installation instructions

Compliances:-

Conforming to regulations:-	UN ECE R107 Emergency Windows technical requirements. FMVSS 217 Window retention and release. International Maritime Organisation Regulation 13.
-----------------------------	--

Quality:-

SAFE-T-PUNCH™ is proudly produced in South Africa under TUV Certified ISO9001:2015 DAkkS Accredited Quality Management System.

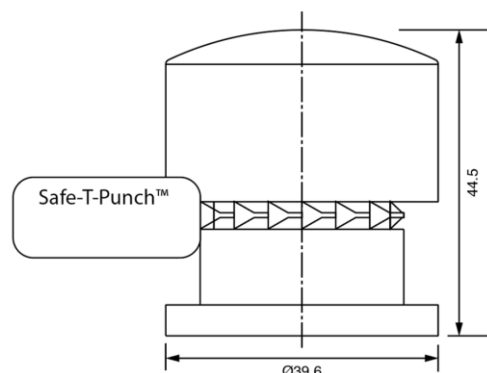

Globally distributed by PLR Distribution (Pty) Ltd
www.Safe-T-Punch.co.za
Enquiries@Safe-T-Punch.co.za